

DIAPHRAGM PRESSURE REGULATORS

PR SERIES

The PR Series is a pressure regulating valve that are suitable for pressure control of air, gas, water, oil and similar fluids requiring constant outlet pressure between 10 and 150 psig.

Technical Data

Differential Pressure: Up to 150psi on water, air, oil, gas, and chemicals
Inlet Pressure: maximum 2.07 Mpa (300psi)
Body Material: CF8M
Diaphragm Material: Neoprene+Nylon;
 Neoprene+Nylon/Teflon lining;
 Newlon (PTFE based, max. 230°C)

Seat Material: Viton or FFKM
Plug & Trim Material: SS316
Operating Temperature: -40°C to +100°C
Adjustable Outlet Pressure in Range:

A	B	C
10~55 psi	40~85 psi	70~150 psi


CV: ½"–2; ¾" & 1"–3.6; 2"–12
Tight Shutoff: Soft (ANSI Class VI Bubble-tight) Shutoff

Approvals:

CE 1128



Dimensions

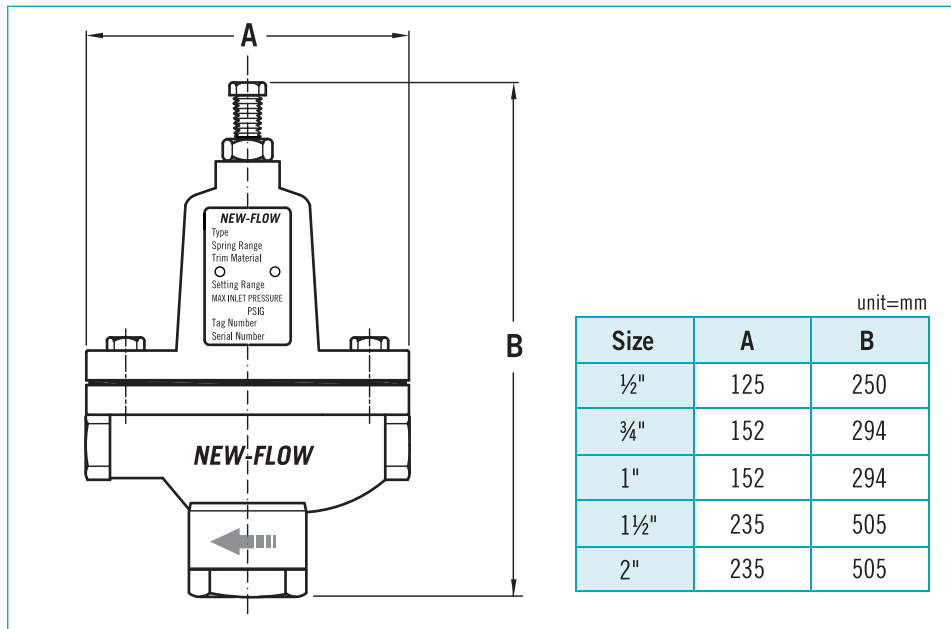

Ordering Information

PR	Code	Process Connection Size									
	1	½"	2	¾"	3	1"	4	1½"	5	2"	
		Code	Range								
		A	10~55 psi			B	40~85 psi		C	70~150 psi	
		Code	Body Material								
		1	Stainless Steel (CF8M)								
		Code	Diaphragm Material								
		1	Neoprene+Nylon			2	Neoprene+Nylon/Teflon lining			3	Newlon
		Code	Seat Material								
		A	Viton			B	FFKM				
		Code	End Connection								
			(A) NPT (B) 150# (C) 300# (D) Other								
PR											Complete Ordering Code